


## M8 DC INDUCTIVE PROXIMITY SWITCH / SENSOR

1.5mm/2mm  
FLUSH / NON FLUSH

### OPERATIONAL DATA:

1. MOUNTING IN METAL	FLUSH / NON-FLUSH
2. SENSING DISTANCE with Fe/ST37-8mm x 8mm x 1mm	1.5mm(FLUSH) 2mm(NON-FLUSH)
3. HYSTERESIS	3% TO 15%
4. REPEATABILITY	0.01mm
5. TEMPERATURE DRIFT	< 10%
6. AMB. TEMP. RANGE	0 DEG.C. TO 70 DEG.C.

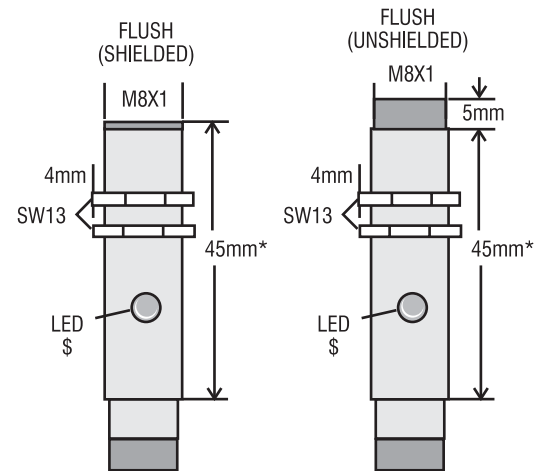

### ELECTRICAL DATA:

7. OPERATING VOLTAGE	10 V TO 30 VDC
8. CURRENT CONSUMPTION	< 20 mA
9. DROPOUT VOLTAGE	< 1V @ max load current
10. SWITCHING FREQUENCY	3 KHz
11. LOAD CURRENT (MAXIMUM)	200mA

### ORDERING CODE: TYPE

PSIBB08PAFOCB02RS	PNP/NO/200mA/FLUSH
PSIBB08PAFCCB02RS	PNP/NC/200mA/FLUSH
PSIBB08PANOCB02RS	PNP/NO/200mA/NONFLUSH
PSIBB08PANCCB02RS	PNP/NC/200mA/NONFLUSH
PSIBB08NAFOCB02RS	NPN/NO/ 200mA/FLUSH
PSIBB08NAFCCB02RS	NPN/NC/ 200mA/FLUSH
PSIBB08NANOCB02RS	NPN/NO/200mA/NONFLUSH
PSIBB08NANCCB02RS	NPN/NC/200mA/NONFLUSH

### MECHANICAL DATA:

12. HOUSING	M 8 X 1mm THREADED BRASS BARREL Ni-CHROME PLATED
13. MOUNTING	8 mm THRU HOLE FIXING BY M8 X1mm TAPPED PAIR OF NUTS
14. TERMINATION	Cu CABLE PVC INSULATED 3X0.34 Sq.mm.

\$ LED along barrel length or backside as per requirement


\* please contact factory for different barrel lengths.

### PROTECTION FEATURES:

15. ENVIRONMENTAL	IP67(tested & certified by CMRI, Dhanbad.)
16. POLARITY REVERSAL	YES
17. OUTPUT	AGAINST INDEFINITE SHORT CIRCUIT

### CONNECTION DETAILS:

BROWN	+V
BLACK	OUTPUT
BLUE	0 V

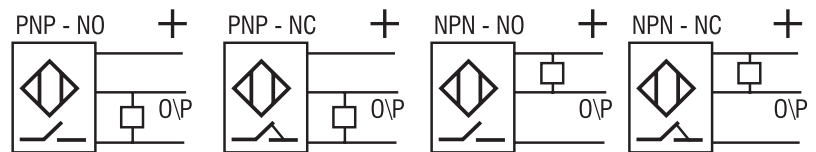

Specifications are subject to change without notice.