


FLIGHT TRIGGER FOR SULZER PU MODEL BRASS BODY

4mm
SHIELDED

OPERATIONAL DATA:

1. MOUNTING IN BRASS	SCREW-NUT FITTED.
2. SWITCHING DISTANCE WITH Fe-ST37 PLATE SIZE 12X12X1mm	4mm
3. HYSTERESIS	3% TO 15%
4. REPEATABILITY	0.01mm
5. TEMPERATURE DRIFT	<10%
6. AMB. TEMP. RANGE	0 DEG.C. TO 70 DEG.C.

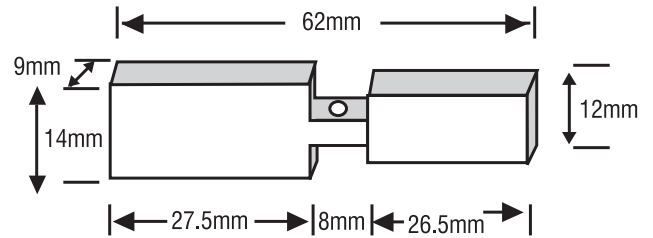

ELECTRICAL DATA:

7. OPERATING VOLTAGE RANGE	15V DC ; $R_L = 300 \text{ OHM}$
8. RIPPLE	<10%
9. CURRENT CONSUMPTION	<=1mA..... ..ACTIVE FACE DAMPED >=4mA..... ..ACTIVE FACE UNDAMPED 10mA..... .. MAXIMUM

OUR PART NO.

Eqv. to MODLE NAME

PSISP8FLTRI

SULZER TW11 & TOYOTO.(#)

MECHANICAL DATA:

10. HOUSING/MOUNTING	BRASS BODY
11. TERMINATION	Cu CABLE PVC INSULATED 2X0.34 Sq.mm

CONNECTION DETAILS:

RED	POLARITY INTERCHANGABLE
BLACK	



Recommended for the application subject to
manufacturer`s
change time to time.

**Please contact factory for different barrel lengths.

Specifications are subject to change without notice.