

MODBUS

All dimensions are in mm.

**Electrical Specification**

Supply	24 V DC ± 10%
Operating Voltage	10 ... 30 V DC
Rated Current	Max. 20 mA per Port
Total Rated Current	Max. 350 mA
Connection	M08 Male Connector
I/Os Connection	M12, 5pin Female Socket
Port	6 (PNP Type)


**Mechanical Specification**

Housing Material	PBT Plastic
Material of Moulding Mass	Nylon 66
Contact Carrier Material	Nylon 66
Contact Material	Brass-Ni Plated
Contact Surface Material	Gold Plated
Material O-Ring	Neoprene
Protection	IP65

**Indications**

Yellow LED	POWER
Red LEDs	NC I/O (B)
Green LEDs	NO I/O (A)

**Connection Diagram**

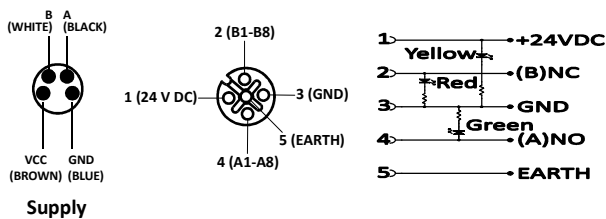

**Environmental Limits**

Operating Temperature	0 ... 55°C
Storage Temperature	0 ... 70°C

**MODBUS Communication**

Protocol	MODBUS
Data Baud Rate	19200
Slave Address	01
Function Code	03
Quantity of Register	01
Communication Topology	RS485

**Accessories**

Accessories	Description
A1*	Name Tag (7 Nos.) Material - PC (Transparent)
A2*	Protection Cap (6 Nos.) Material - Nylon-66 (Black)
A3#	CBF08-S44N0-02BPVC
A4#	CNM12-S5SP0-BP7 (6 Nos.)

\* Included in offer

# Excluded (To be ordered separately)

Specifications are subject to change without notice.

