


DIGITAL PRESETTABLE COUNTER

ELECTRICAL DATA:

- | | |
|--|--|
| 1. SUPPLY VOLTAGE | 230 V AC +/- 10%. 50 Hz |
| 2. OUTPUT FOR PROXIMITY SWITCH / SENSOR | 12 V DC |
| Control Circuit: | |
| 3. NO OF DIGITS | FOUR OR SIX |
| 4. MAX. RANGE | 9999 OR 999999 |
| 5. OUTPUT | RELAY OUTPUT |
| 6. OUTPUT CONTACTS | 1 C/O RELAY CONTACTS, 5A/230 V AC RATING |
| 7. AUTORESET IS | OPTIONAL. |
| 8. ADVANCED BUZZER | OPTIONAL. |
| 9. LAST COUNT STORED IN MEMORY AT POWER FAILURE. | |

Outputs

- | | |
|-------------------------------|------------------------------------|
| 10. OUTPUT CONTACTS | 1NO + 1NC
5A RESISTIVE AT 230V~ |
| 11. CONTINUOUS CURRENT RATING | |
| DC11 DUTY | 1.25A @ <=24VDC~ |
| AC11 DUTY | 1.5A @ <=230V~
0.2A @ 220V |

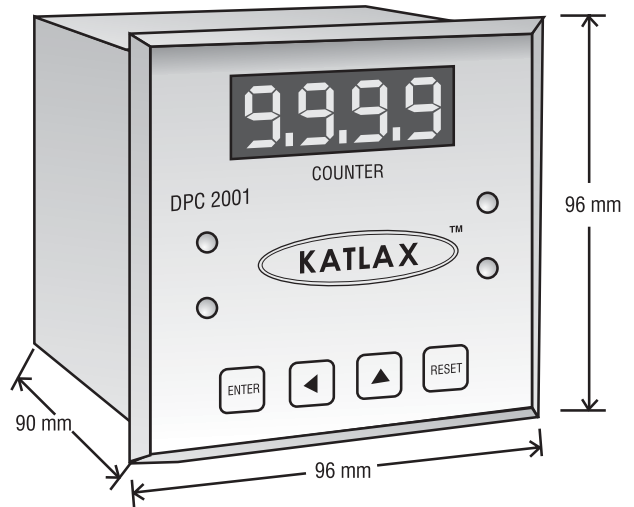

MECHANICAL DATA:

- | | |
|-----------------|--|
| 12. HOUSING | PLASTIC MOLDED FRONT AND BACK WITH POWDER COATED METAL COVER IN TWO SIZES
* 96mm X 96mm X 90mm
* 72mm x 72mm x 110mm |
| 13. MOUNTING | BY SCREW OR BUCKLE |
| 14. TERMINATION | TERMINAL COMPARTMENT FOR MAXIMUM CROSS-SECTIONAL AREA=1 X 2.5 Sq.mm. |

ORDERING CODE:

TYPE

PRA230DPC152C5A6	6 DIGIT
PRA230DPC152C5A4	4 DIGIT


CONNECTION DETAILS:

BATCHCOUNT RELAY	NO / C / NC
VALVE RELAY	NO / NC / C
230V AC I/P	L / N / E
PROXIMITY SENSOR	BROWN / BLACK / BLUE

Recommended for the application subject to manufacturer's change time to time.



NO	C	NC	NO	NC	C
BATCHCOUNT RELAY			VALVE RELAY		
230V AC I/P			PROXIMITY SENSOR		
L	I	E	BROWN	BLACK	BLUE

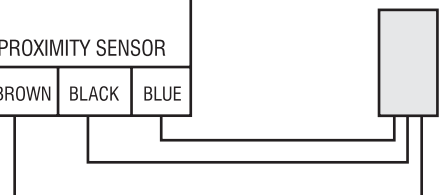

Specifications are subject to change without notice.